

GIPRO ATRE GEAR INDICATOR

Supplementary Manual

Kawasaki ZX-14 ABS TC 2012- (GPAT-K01)

Secure the bike on a stand.



Remove the seat.

Remove the side fairings.

Remove the plastic cover from the fuel tank.

Remove the fuel tank.



Locate the green, 4-pole gear position sensor connector under the airbox and disconnect it.



GIPRO ATRE GEAR INDICATOR

Supplementary Manual

Kawasaki ZX-14 ABS TC 2012- (GPAT-K01)

Release the Green/Red and Black female terminals out from the smaller side of the gear position sensor connector.




Insert the two female terminals to the smaller 3-pole plug adapter.

(The Red wire is pre-installed.)



Release the Green/Red and Black/Blue male terminals out from the larger side of the gear position sensor connector.

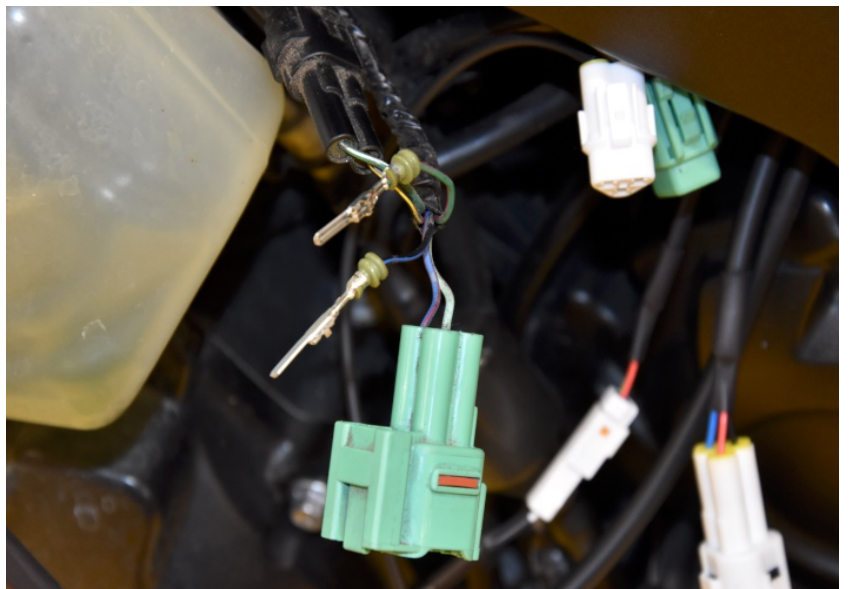

GIPRO ATRE GEAR INDICATOR

Supplementary Manual




Kawasaki ZX-14 ABS TC 2012- (GPAT-K01)


Insert the two male terminals to the larger 3-pole plug adapter.

Reconnect the 4-pole green connector.

Connect the Gipro plugs to the 3-pole plug adapters.

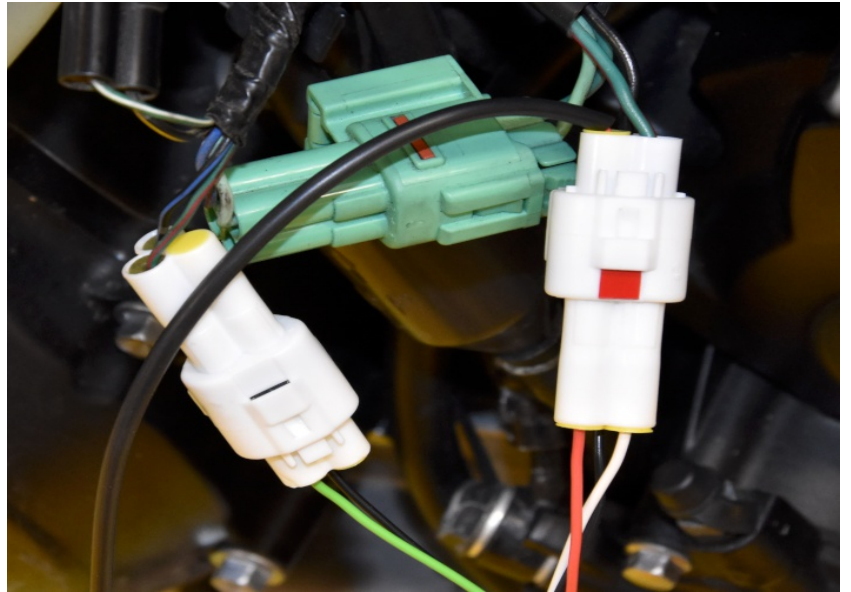

Connect the GPAT G2 Red wire to the Blue wire of the brake light switch 2-pole connector.

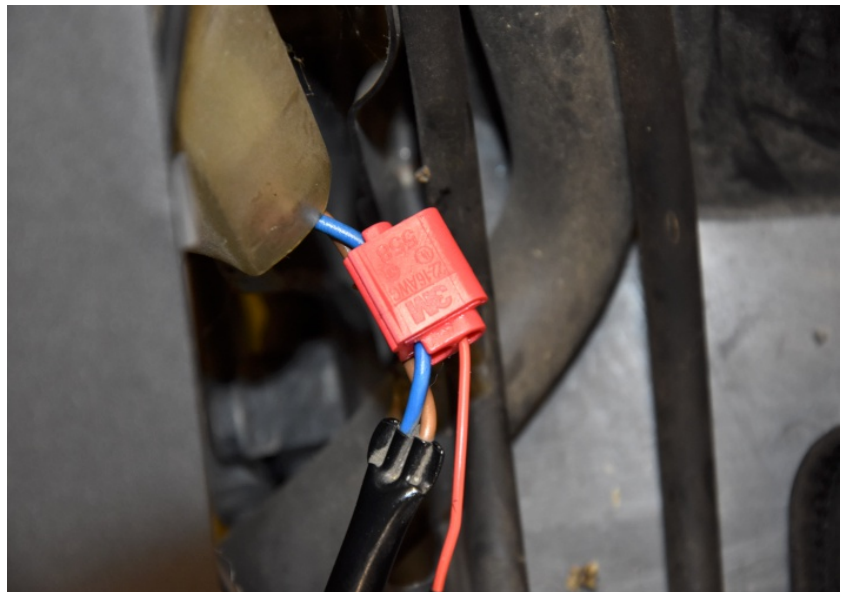

Typical position for the Gear Indicator.

Secure the unit properly.

